








Accessibility Upgrades at **Church Ave Station**



September 2023

Project Intent

- ADA Accessibility part of a larger project at 13 stations throughout NYC
- Increased ADA Accessibility within NYCT infrastructure
- MTA's first Public-Private-Partnership project where the developer will design, build, and maintain the installed elevators for 25 years.
- Design-build contract awarded: May 2023
- Completion (this station): Q3 2025

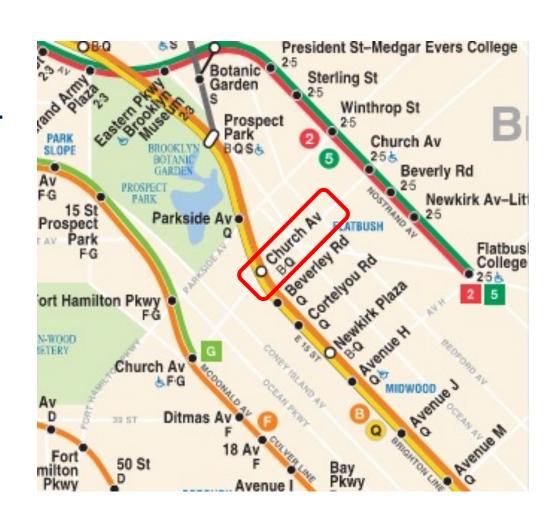

New ADA Entrance Location





Customer Benefits – ADA Scope




Rendering of upgraded Church Ave station entrance.



Improved access to the open-cut station through:

- (2) New elevators (1 each from street to platform level going North/South bound)
- (2) New stairs
- New Control Area
- Raised ADA boarding areas
- ADA compliant sidewalk curbs
- ADA compliant stairs
- Agent booth modifications

Customer Benefits – General Scope

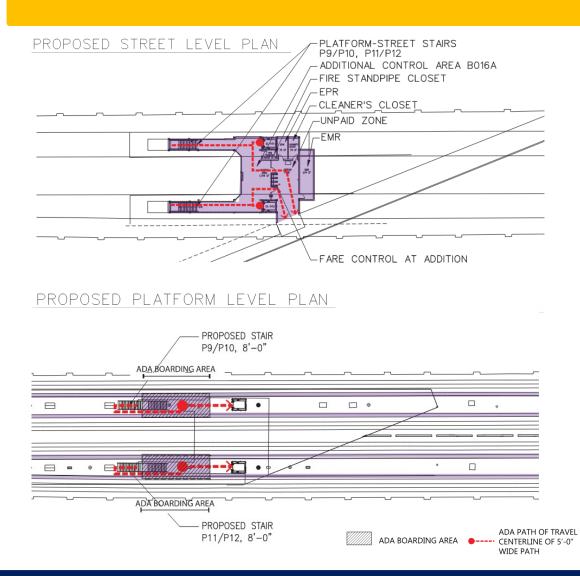

- Enhanced customer flow
 - New control area with street level access
 - New additional stairs
 - New elevators

AREA OF WORK


- New Station Extensions with Updated MTA Standard Features
 - Enhanced station reliability
 - New and upgraded communications, electrical and MEP systems to support ADA upgrades
 - Improved Safety due to new platform edges.

Additional Scope Items - Station Specific


- Structural Concrete Work
- Structure & Elevator Steel Framing
- Mechanical/Plumbing Work
- Electrical Work
- ADA Path of Travel Work & Platform Repairs
- Reconstruction of platform edges
- Architectural Work:
 - Concrete, Painting, Roofing,
 - Misc. Metals, Glazing



Elevator Locations

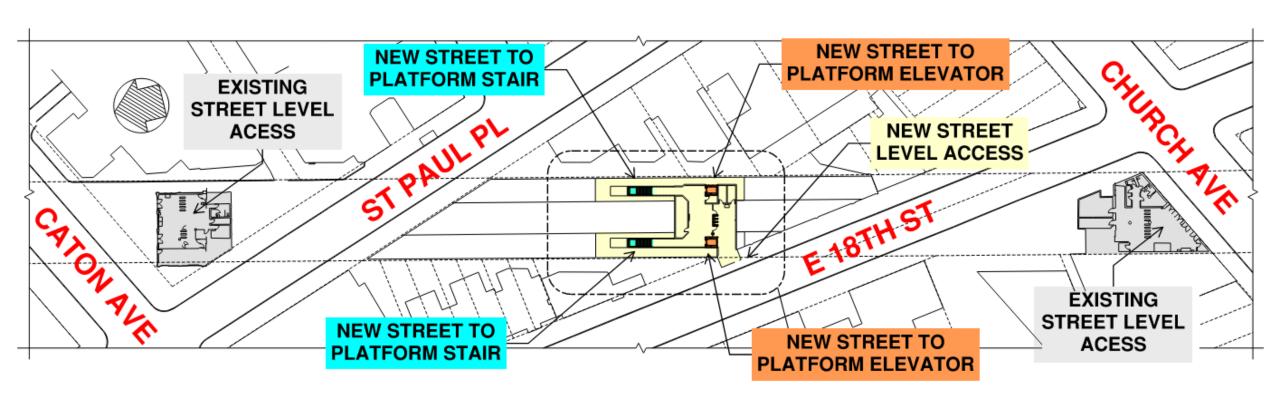

Elevator Locations

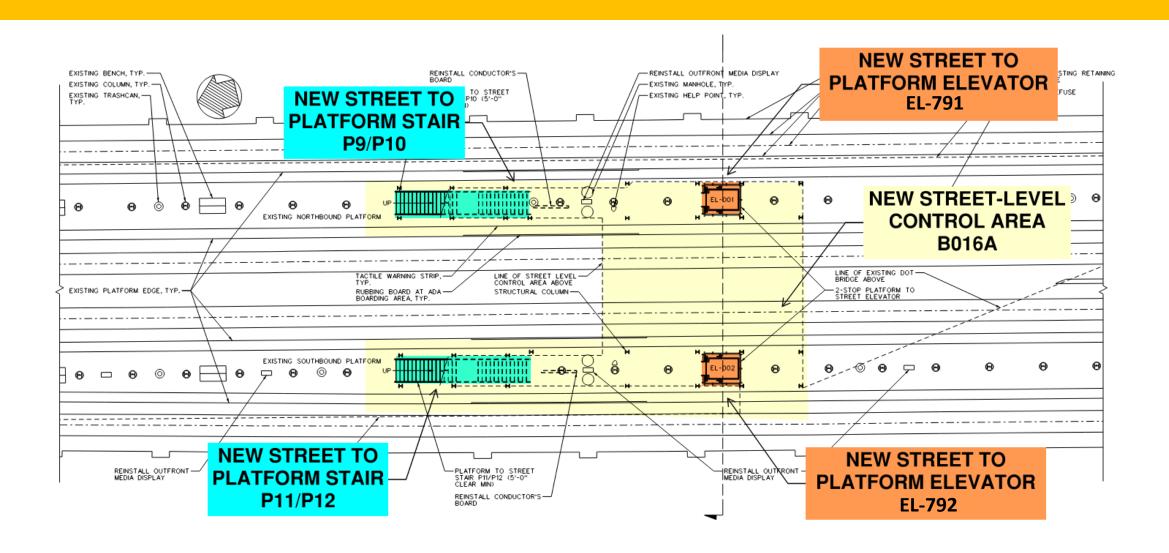

Church Ave Station Schedule


Station	Start Date	Completion Date
Overall Station Schedule	Q4 2023	Q3 2025
Location	Activity	Start Dates
PHASE I – Platform Scope	Southbound Platform	Q4 2023
	MPT & Street Utility Relocation Work	Q1 2024
	Northbound Platform	Q3 2024
PHASE 2 – New Elevators and Control Area Street Level → Platform	Elevator Installation	Q3 2024
	Structural Work @ New Control Area	Q4 2024
	Architectural Work @ New Control Area	Q1 2025
Construction Complete	Commissioning & Demobilization	Q3 2025

SERVICE OUTAGES

- Planned short term closures over 2024-2025:
 - 3 Partial Station Closures
 - 60 day continuous duration
 - 8 Weekend Full Station Closures
 - Except during summer embargo: Friday prior to Memorial Day weekend through the weekend after Labor Day.

Work Currently Underway

- Test pits to determine utility locations and foundations
- Street and station surveys
- Field Meetings
- Design work

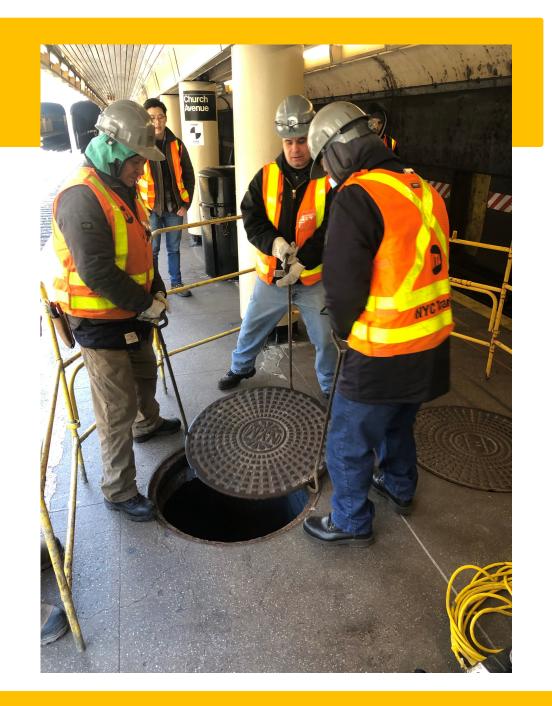

Public Communication

- Project website: https://new.mta.info/project/station-accessibility-upgrades
- Project Hotline: 845-735-3600
 - Dedicated hotline
 - Receive and respond to non-emergency complaints and issues from the public
- MTA Community Relations Representative
 - Nick Roloson
 - nick.roloson@mtahq.org
 - 646-252-2505

Questions/Comments?